

MICRO 600




Miniature ISR System for sUAS

MICROCON
UNLEASH
YOUR MICRO **POWER**



Operational Impact Enhancement

- Two FHD Global Shutter VIS cameras
- Two Uncooled IR cameras - 12μm
- Simultaneous Video output
 - Parallel / PIP / Raw
- LOS Stabilization
 - Opto-mechanical stabilization
 - Digital stabilization
- Airborne ISR Tracker
- H.265 encoder
- Advanced Two Axis Gimbal Architecture
 - Brushless motors and precision encoders
 - Aerodynamics
- Seamless Integration
 - Ethernet interface
 - SDK for fast platform integration
 - Optional - H.265 decoder SDK
 - MavLink - Optional
- Inertial Navigation - Optional
- Optional AI Functionality
 - VMD - Video Motion Detection
 - ATR-Automatic Target Recognition
 - Homing tracker
- IP66
- Non-ITAR

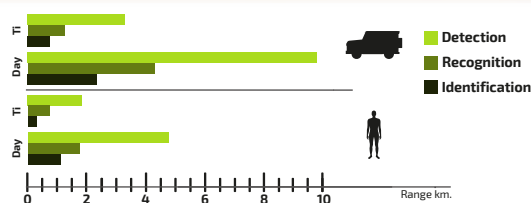

Maximum Performance Per Dollar

Electro-Mechanical

Type:	2 Gimbal Gyro-stabilized System
Field of Regard:	Elevation: -140° to +90° Azimuth: ±175°
Angular Velocity:	Up to 120 °/sec on both axes

Thermal Nighttime Channel

Spectral Range:	8-12μm
Detector Type:	LWIR uncooled 640x480
Zoom:	Continuous zoom x16
Field of view:	32° - 2°

VIS Daytime Channel

Detector Types:	FHD CMOS Global Shutter
Zoom:	Continuous zoom x31
Field of View:	53° - 2°

Electrical Interface

Power Supply:	12-32 VDC
Power Consumption:	Nominal - 25W
Video Outputs:	H.265 over Ethernet

Environmental Conditions

Operating Temperature:	-30°C to +55°C
Ingress Protection:	IP66

Let's Talk



Microcon Vision Ltd.
POBox 611, Hod Hasharon
Israel 4510502

MICROCON

CONTROP